


TO-126 Plastic-Encapsulate Transistors

FEATURES

- High Current
- Complement To BD136, BD138 And BD140
- TRANSISTOR (NPN)

MECHANICAL DATA

- Case style: TO-126 molded plastic
- Mounting position: any

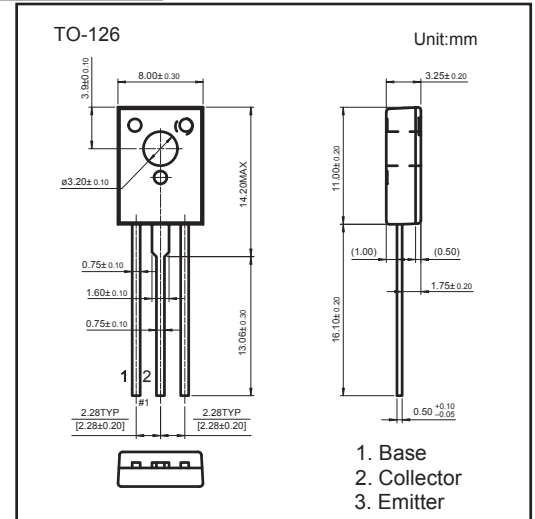

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Symbol	Parameter	Value	U
V_{CBO}	Collector-Base Voltage	BD135 45 BD137 60 BD139 80	V
	Collector-Emitter Voltage	BD135 45 BD137 60 BD139 80	V
	Emitter-Base Voltage	5	V
I_C	Collector Current	1.5	A
P_C	Collector Power Dissipation	1.25	W
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	100	°C/W
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~+150	°C

ELECTRICAL CHARACTERISTICS $T_a = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 0.1\text{mA}, I_E = 0$				V
BD135			45			
BD137			60			
BD139			80			
Collector-emitter sustaining voltage	$V_{CEO(SUS)}$	$I_C = 0.03\text{A}, I_B = 0$				V
BD135			45			
BD137			60			
BD139			80			
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 0.1\text{mA}, I_C = 0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB} = 30\text{V}, I_E = 0$			0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$			10	μA
DC current gain	$h_{FE(1)}$	$V_{CE} = 2\text{V}, I_C = 150\text{mA}$			250	
	$h_{FE(2)}$	$V_{CE} = 2\text{V}, I_C = 5\text{mA}$	25			
	$h_{FE(3)}$	$V_{CE} = 2\text{V}, I_C = 500\text{mA}$				
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$			0.5	
Base-emitter voltage	V_{BE}	$V_{CE} = 2\text{V}, I_C = 500\text{mA}$			1	V

*Pulse test: pulse width $\leq 350\mu\text{s}$, duty cycles $\leq 2.0\%$.

CLASSIFICATION OF $h_{FE(1)}$

RANK	6	10	16
RANGE	40-100	63-160	100-250

RATINGS AND CHARACTERISTIC CURVES

