

HIGH EFFICIENCY RECTIFIERS

VOLTAGE RANGE: 50--- 1000 V

CURRENT: 3.0 A


FEATURES

- The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- High reliability
- Low forward voltage drop
- Low power loss, high efficiency
- High forward surge current capability
- High temperature soldering guaranteed: 260 C/10 seconds at terminals
- Component in accordance to RoHs 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

- Case style: DO-27 plastic molded
- Terminals: Axial lead ,solderable per MIL- STD-202,Method 208
- Polarity:Color band denotes cathode end
- Mounting Position:Any

DO-27

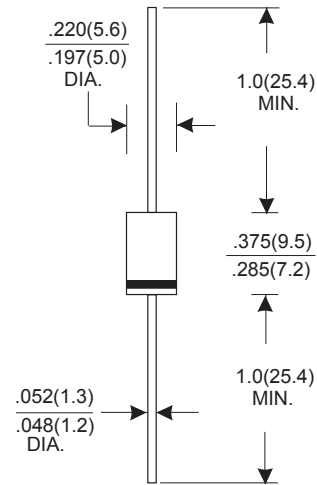

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)Single phase,half wave,60 Hz,resistive or inductive load.
For capacitive load,derate by 20%.

		HER 301	HER 302	HER 303	HER 304	HER 305	HER 306	HER 307	HER 308	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current.375"(9.5mm) Lead Length at Ta=55°C	$I_{F(AV)}$	3.0								A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150.0								A
Maximum Instantaneous Forward Voltage at 2.0A	V_F	1.0		1.3		1.7			V	
Maximum reverse current at rated DC blocking voltage	@T _A =25	10.0								μA
	@T _A =100	150.0								
Maximum reverse recovery time (Note1)	t_{rr}	50				75				ns
Typical junction capacitance (Note2)	C_J	70				50				pF
Typical thermal resistance	$R_{θJA}$	30								°C/W
Operating junction temperature range	T_j	- 55 ---- + 125								°C
Storage temperature range	T_{STG}	- 55 ---- + 150								°C

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal Resistance from Junction to Ambient.375"(9.5mm) lead length.

RATINGS AND CHARACTERISTIC CURVES

FIG.1 -- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

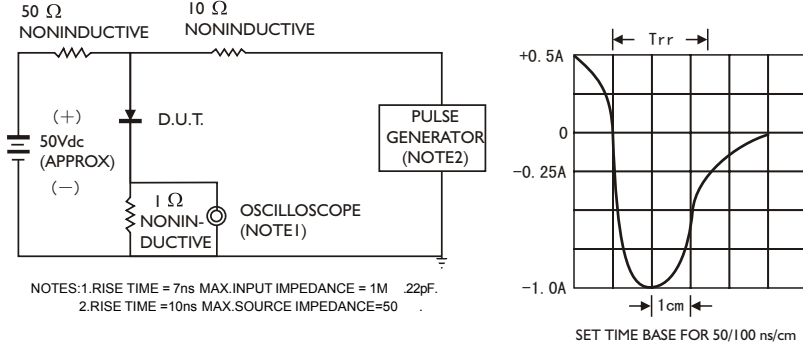


FIG.2 -- FORWARD DERATING CURVE

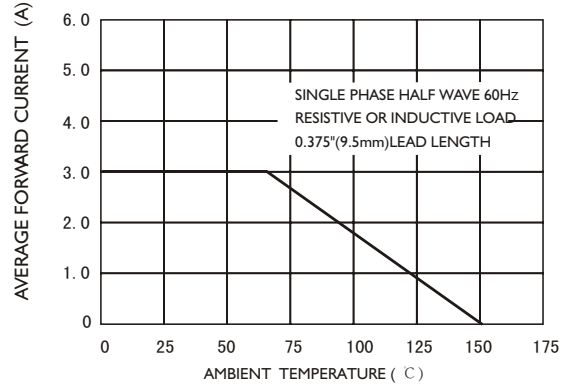


FIG.3 -- TYPICAL FORWARD CHARACTERISTIC

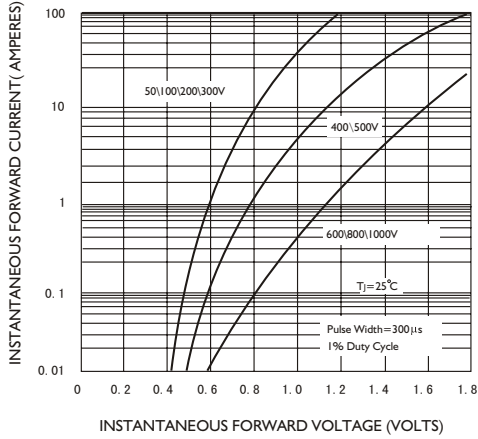


FIG.4 TYPICAL REVERSE CHARACTERISTIC

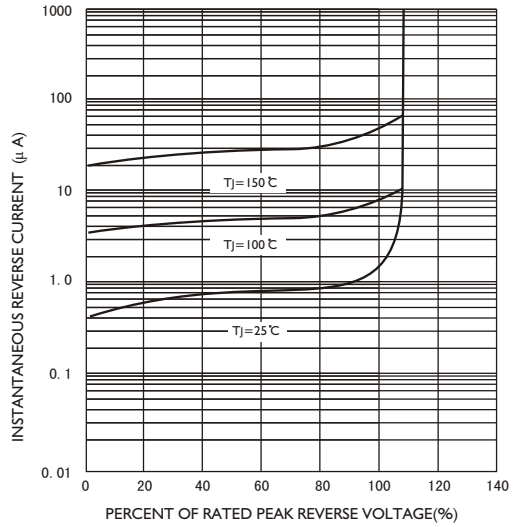


FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

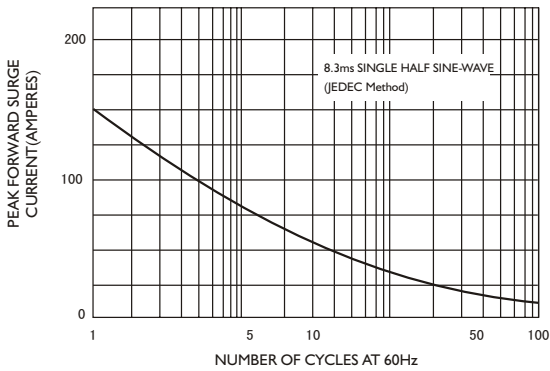


FIG.6-TYPICAL JUNCTION CAPACITANCE

